

## Invitation for Bid

Fremont County School District No. 24 is now accepting sealed bids for our gym floor refurbishment. Work will include, but is not limited to, furnishing of labor, tools, materials, and equipment necessary for the refurbishment of our two gymnasium hardwood floors. This project can be started by May 20th, 2024, and must be completed by August 5th, 2024.

To arrange a walk through, you may contact us at 307-709-1243 or via email at [jpinger@fremont24.com](mailto:jpinger@fremont24.com).

A Bid Form may be obtained by contacting Kay Watson at (307) 876-2583, via the email below, or picked up at 404 Wrangler Way, Shoshoni Wyoming 82649 during regular office hours. The form is also available on the school district website: [shoshonischools.org](http://shoshonischools.org) – Department–Business Services.

Sealed bids clearly marked “Gym Floor Sanding/Resurfacing ” and returned no later than 10:00 a.m. on February 26, 2024. Proposals may be delivered to the District Administration office prior to the deadline or emailed to [kwatson@fremont24.com](mailto:kwatson@fremont24.com) on February 26th prior to 10:00 a.m.

Any questions need to be directed to J.J. Pingetzer, Maintenance Director, [jpinger@fremont24.com](mailto:jpinger@fremont24.com), or (307) 709-1243.

Selection will be made at the next regular meeting of the Fremont County School District #24 Board of Trustees on February 26th, 2024.

Fremont County School District #24 Board of Trustees reserves the right to refuse any and all bids and to accept the bid that, in its judgment, will best serve the needs of the school district.

*Please publish: Riverton Ranger - February 24, 2024*

## **Bid Form: Gym Floor Sanding/Resurfacing**

We, the pricing agency, certify that the bid meets or exceeds the specifications set forth in National, State, and Local Regulations and Requirements.

**Delivery Date:** Soonest possible date or as negotiated with the owner. The project must be completed no later than August 5th, 2024.

### **Overview:**

Fremont County School District #24 is located in Shoshoni, Wyoming. The district built a new K-12 building commissioned in August of 2016. Since then the gymnasium floor finish has failed and has exposed wood. Our District needs a complete renovation of our main competition gym floor, along with our auxiliary gym floor.

### **Specifications:**

- **Contractor Qualifications:** An experienced installer who has completed wood athletic Flooring finishes similar in material, design, and extent to that indicated for this project and whose work has resulted in wood, athletic-flooring installations with a record of successful in-service performance. Proof of insurance will be required when the bid is awarded.
- **Contractors Responsibilities:** including the following, but not limited to:
  - a. Sanding
  - b. Inspect and replace any cracked or damaged wooden planks
  - b. Staining, Painting game lines, markers, and center graphics
  - c. Resurfacing
  - e. Finish
  - f. Dust control
- **Equipment Specifications:** provide products by one of the following or approved equivalent:
  - Volleyball Pole covers: to be replaced with hinged all brass covers manufactured by Jaypro, Gared, or Draper.
  - Thresholds: to be replaced with heavy-duty commercial aluminum threshold

## ● **MANUFACTURERS**

**Manufacturers:** Subject to compliance with requirements, provide products by one of the following or approved equivalent:

- a. Basic Coatings.
- b. BonaKemi USA, Inc.
- c. Crawford Laboratories.
- d. Hillyard Inc.
- e. Huntington Laboratories, Inc.
- f. National Coatings Co.

### **3. FINISHING MATERIALS**

**A.** Floor-Finish System: VOC-compliant oil-modified seal and finish on raw wood or other approved by FCSD#24.

**B.** High-gloss enamel compatible with finish and recommended by finish and paint manufacturers for this purpose.

### **4. SANDING AND FINISHING**

**A.** Examine substrates, areas, and conditions, for compliance with requirements, installation tolerances, and other conditions affecting the performance of the wood-flooring assembly. Replace cracked or damaged planks. Replacement planks are to be paid \$140 per board replaced. Proceed with installation only after unsatisfactory conditions have been corrected and approved by Fremont County School District #24.

**B.** Machine sand with coarse, medium, and fine grades of sandpaper to achieve a level, smooth, uniform surface without ridges or cups. Remove the sanding dust by tack or vacuum.

**C.** Finish: Apply seal and finish coats of finish system according to the manufacturer's written instructions. Provide not less than four coats total and not less than two-finish coats.

**D.** Use finishing methods the finish manufacturer recommends to reduce grain raise and side bonding effects.

**E.** Lines, Markers, and Center Graphics: Apply game-line and marker paint between the final seal coat and first finish coat according to the paint manufacturer's written instructions and WHSAA / NFHS rules and regulations—mask flooring to provide sharp edges. Where game lines cross, break minor game lines at the intersection; do not overlap lines.

**F.** New floors will follow the graphic design guidelines shown below as well as specifications outlined in the clarifications section below:


**Clarifications:**


- Includes regular working hours, Monday-Friday, as long as there are no interruptions to the learning environment. If classroom access is needed or if construction activities are required while school is in session, work must be performed between 4:00 pm and 7:00 am.
- Any onsite workers who will not be accompanied by school district personnel will be required to have a background check before working if children are present in the building.
- Main Gym layout includes 1 main basketball court, 1 central volleyball court, two secondary basketball courts, and two secondary volleyball courts.
  - Secondary courts in the main gym are to be painted up to the primary basketball court border but not to intersect( see attached photo of the current main gym for reference); this is only under the bleachers. Secondary courts within the primary court is only to include the corner and other necessary markings needed to tape the layout of the courts. Dot drill and ladder drill at the base of the secondary court are to be added. A photo with drills roughly laid out has been added for reference.
- Auxiliary Gym layout includes 1 central basketball court, 1 central volleyball court, two secondary basketball courts, two secondary volleyball courts, and four badminton courts.
  - Secondary courts are only to include the corner and other necessary markings needed to tape the layout of the courts. We do not want fully painted secondary court lines.
- Secondary courts are to be painted in a tan, sand, or almond color to limit distractions from the primary court.
- Primary courts are to follow the current WHSAA / NFHS policies for layouts and markings of each sport.
- Attached below is an image of the final design that FCSD#24 wants to proceed with.




Existing Main Gym Photos



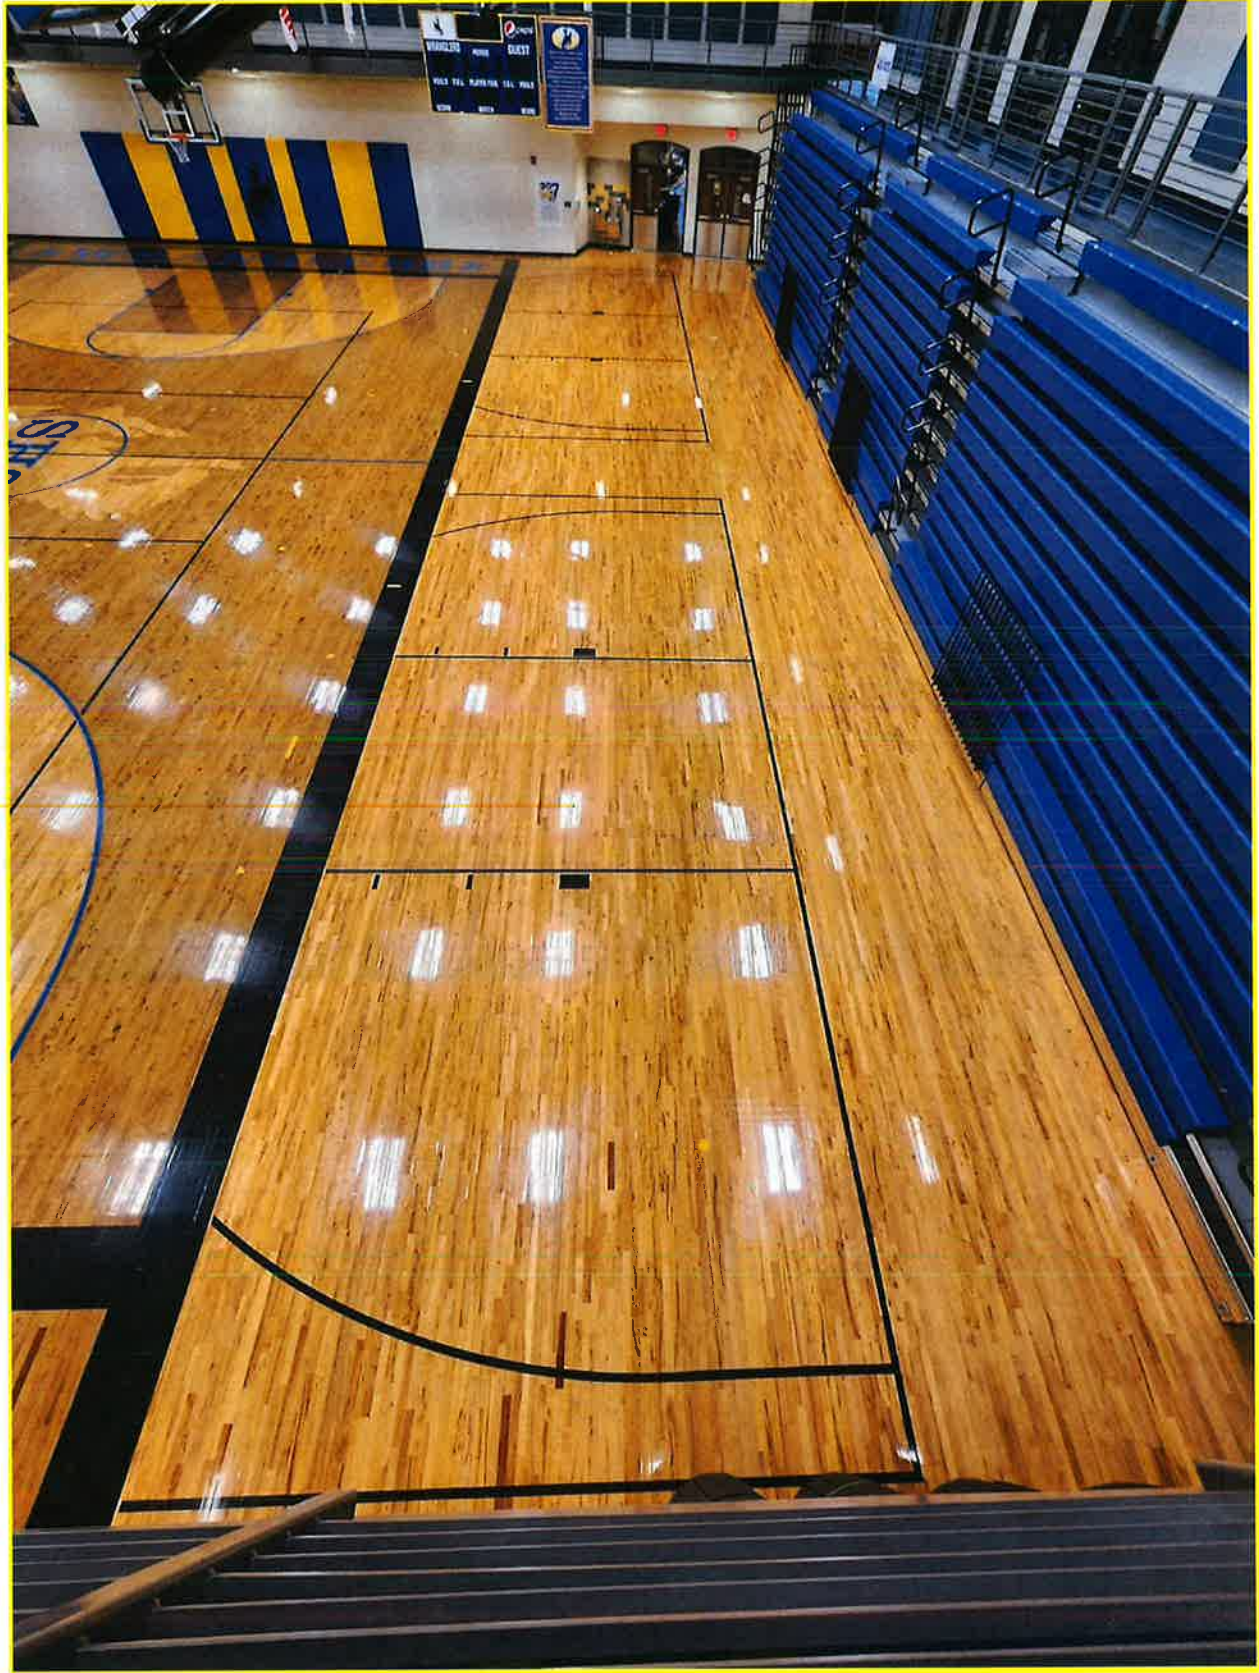

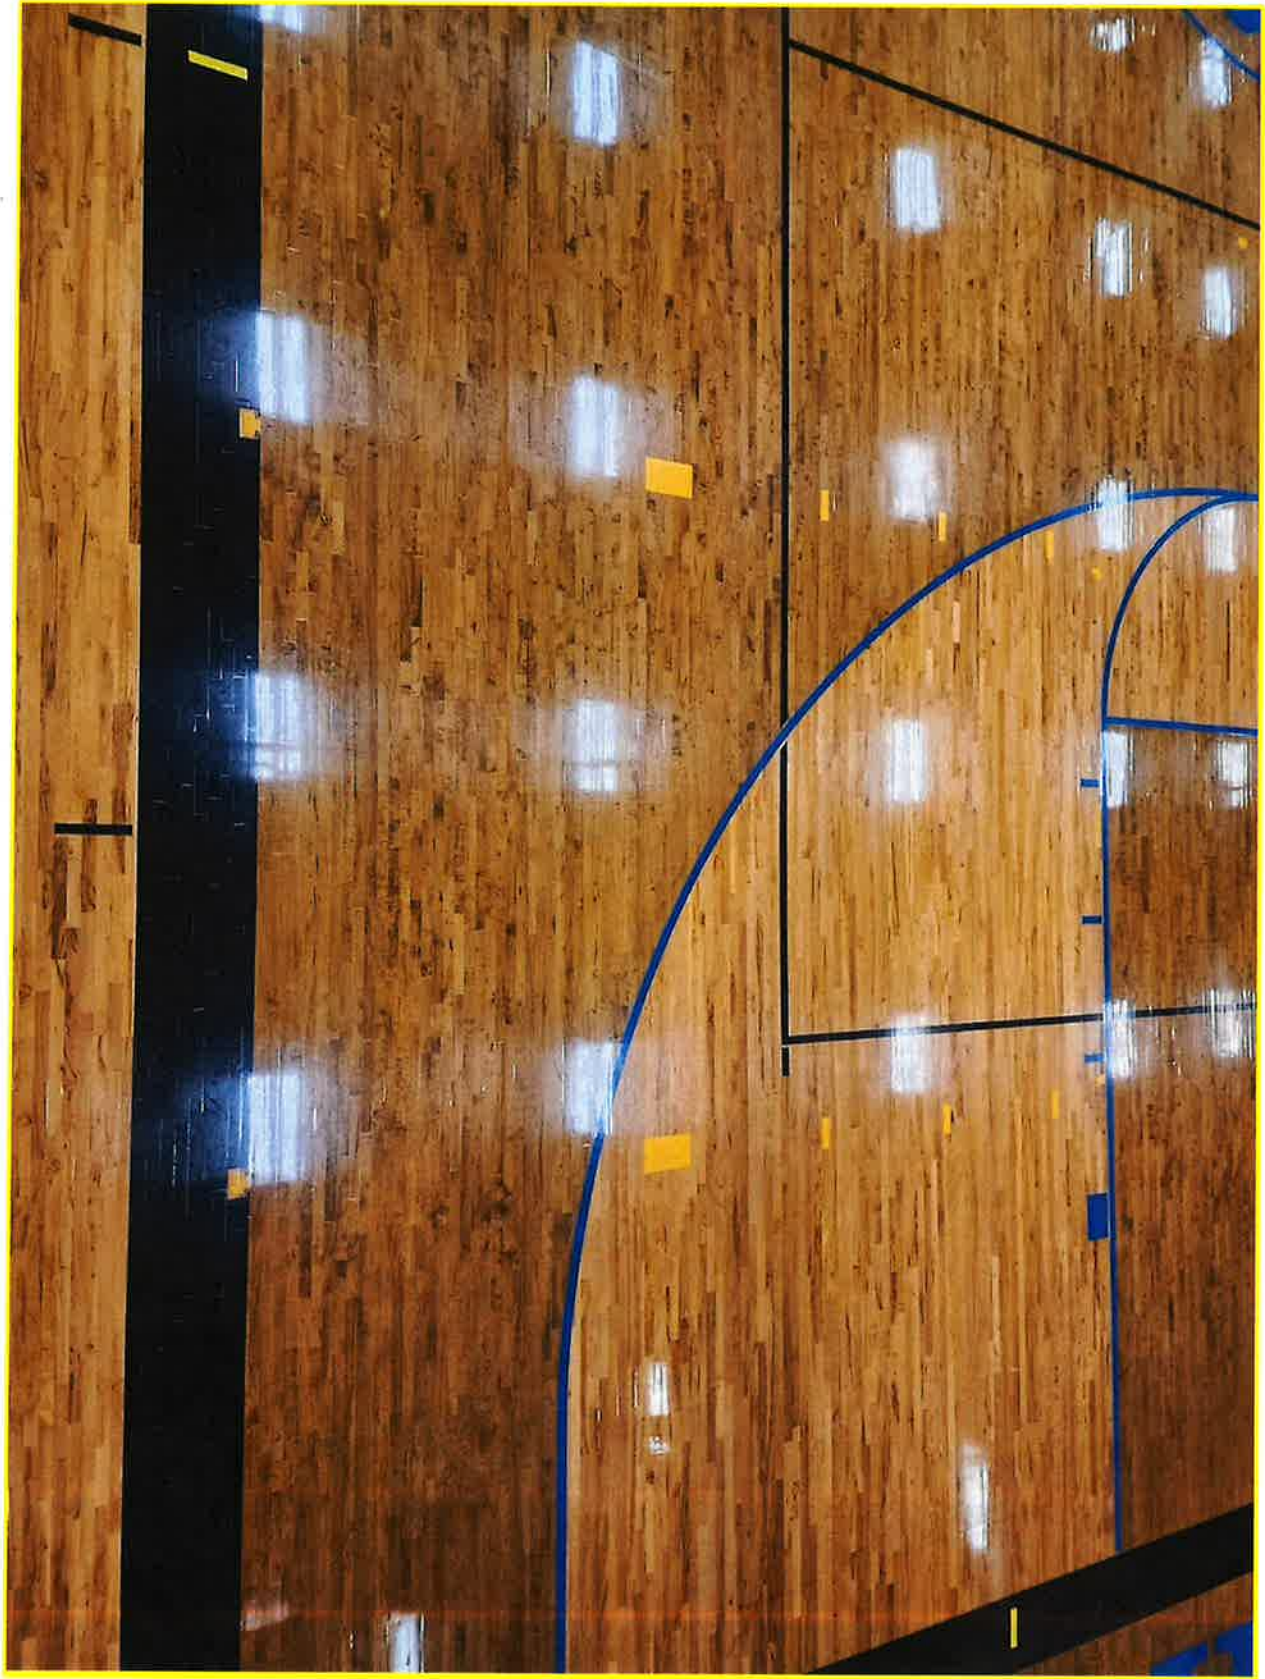

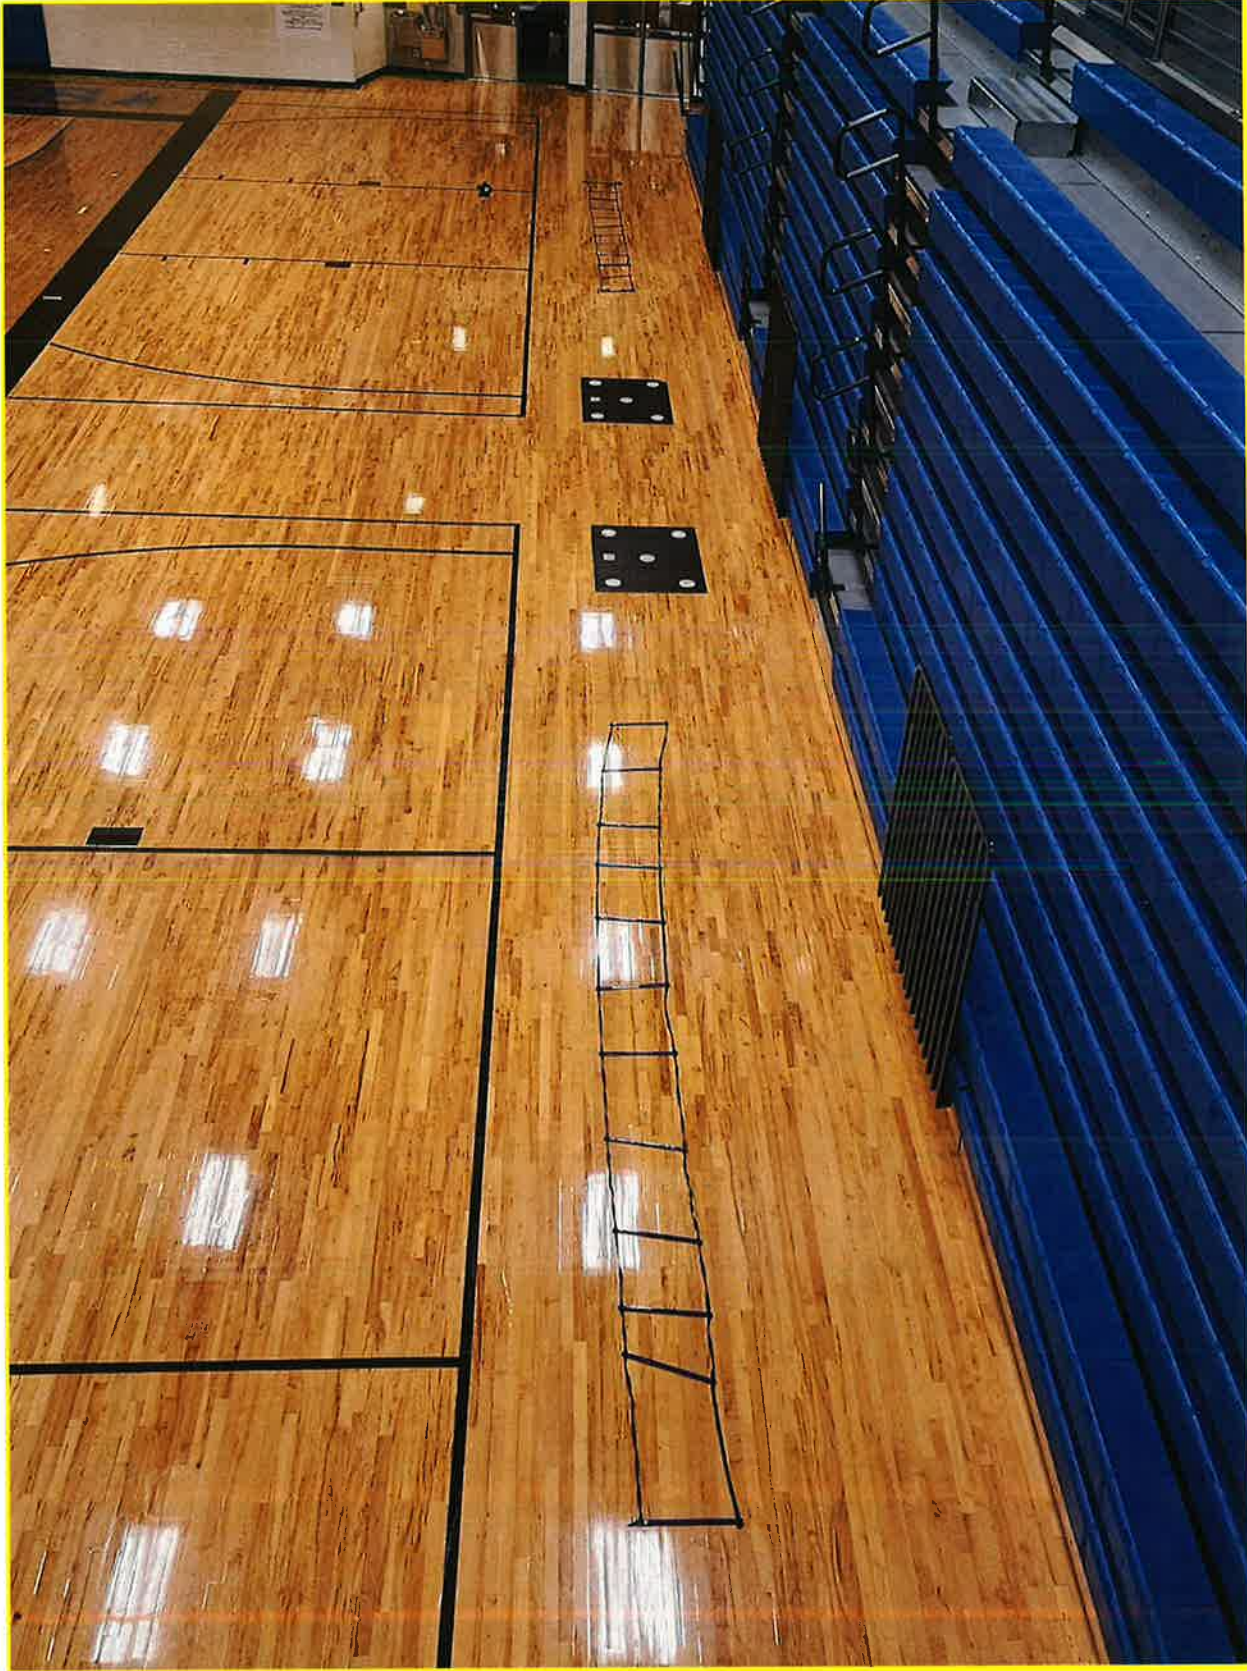





Existing Auxiliary Gym Photos






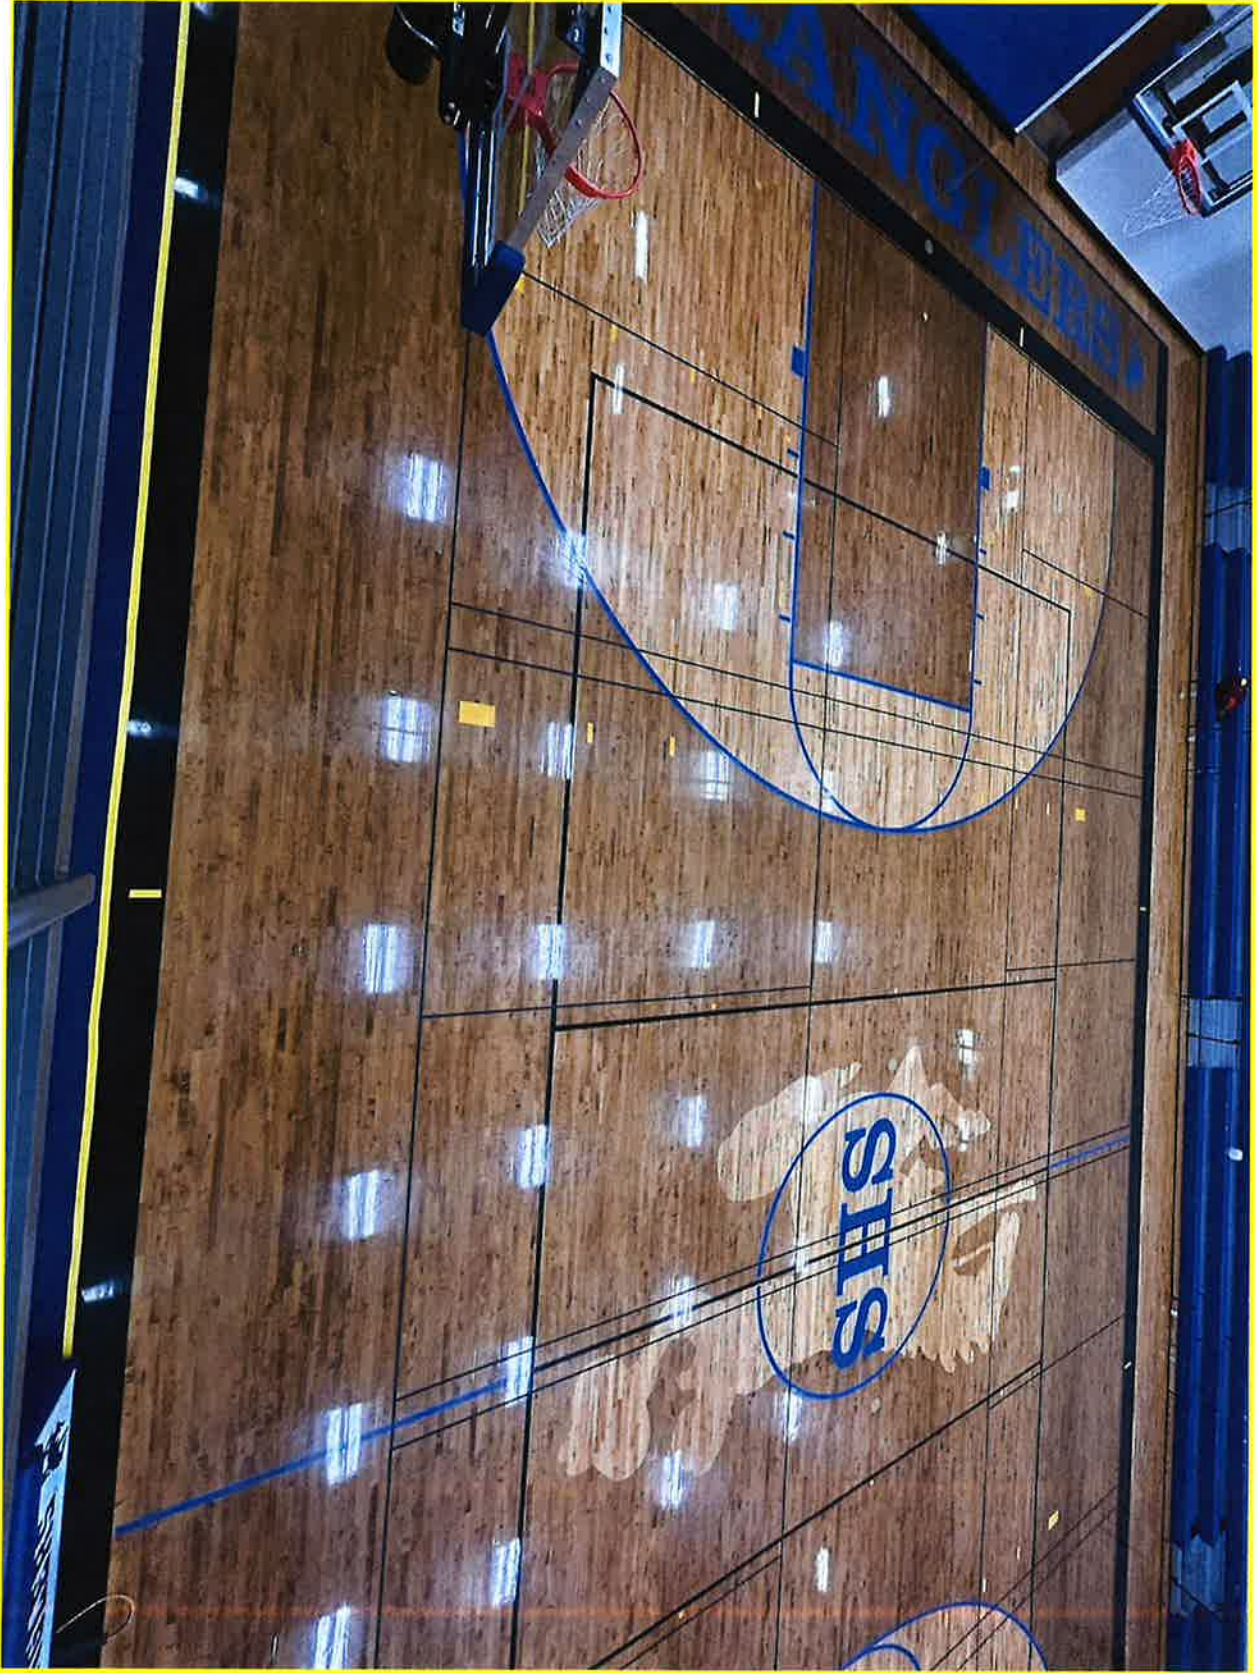

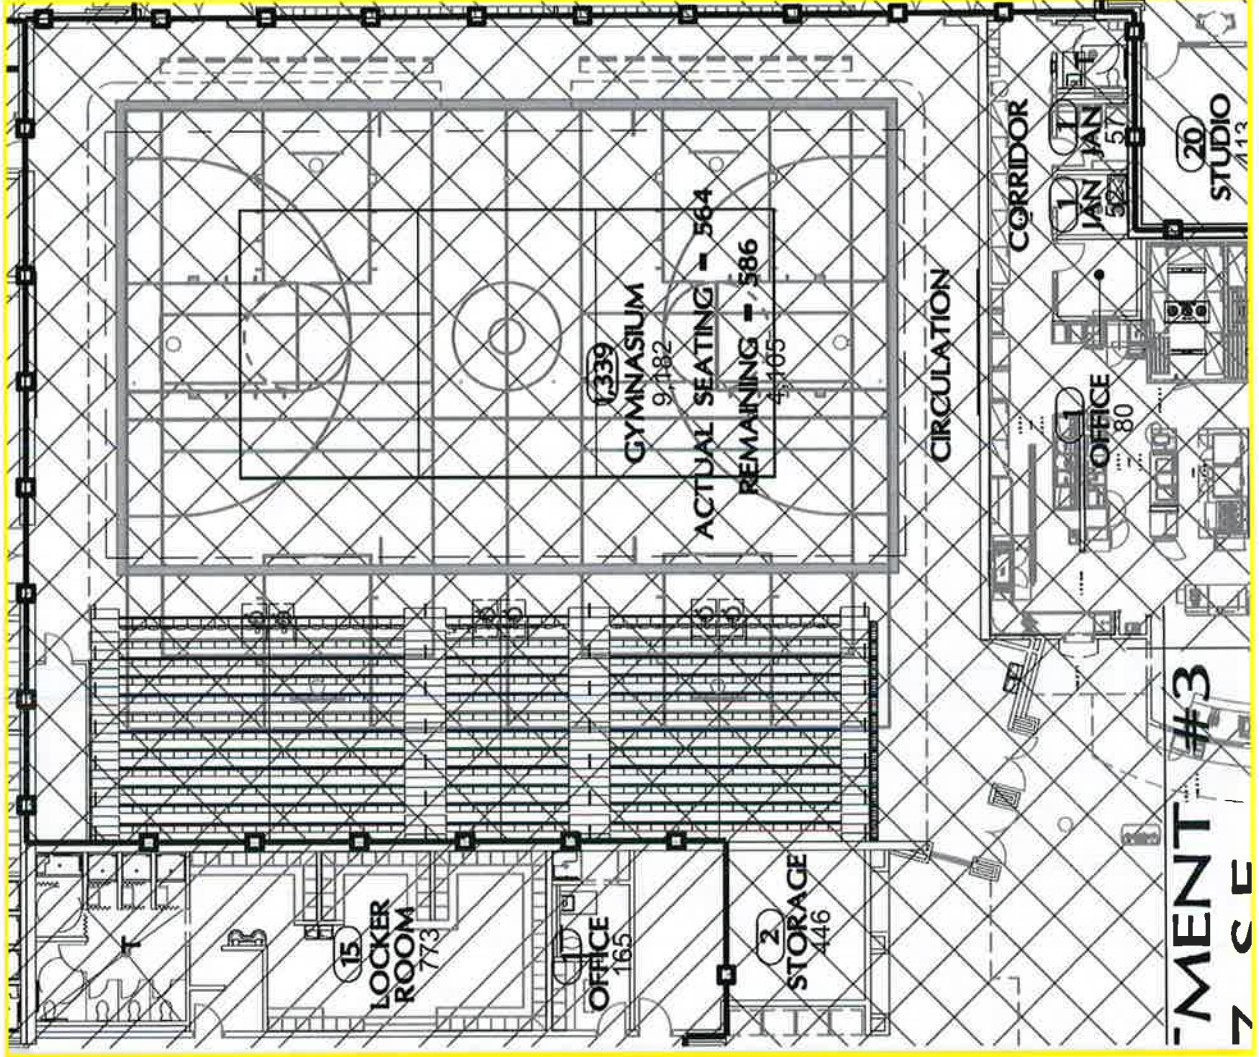

MENT #3  
7 CE

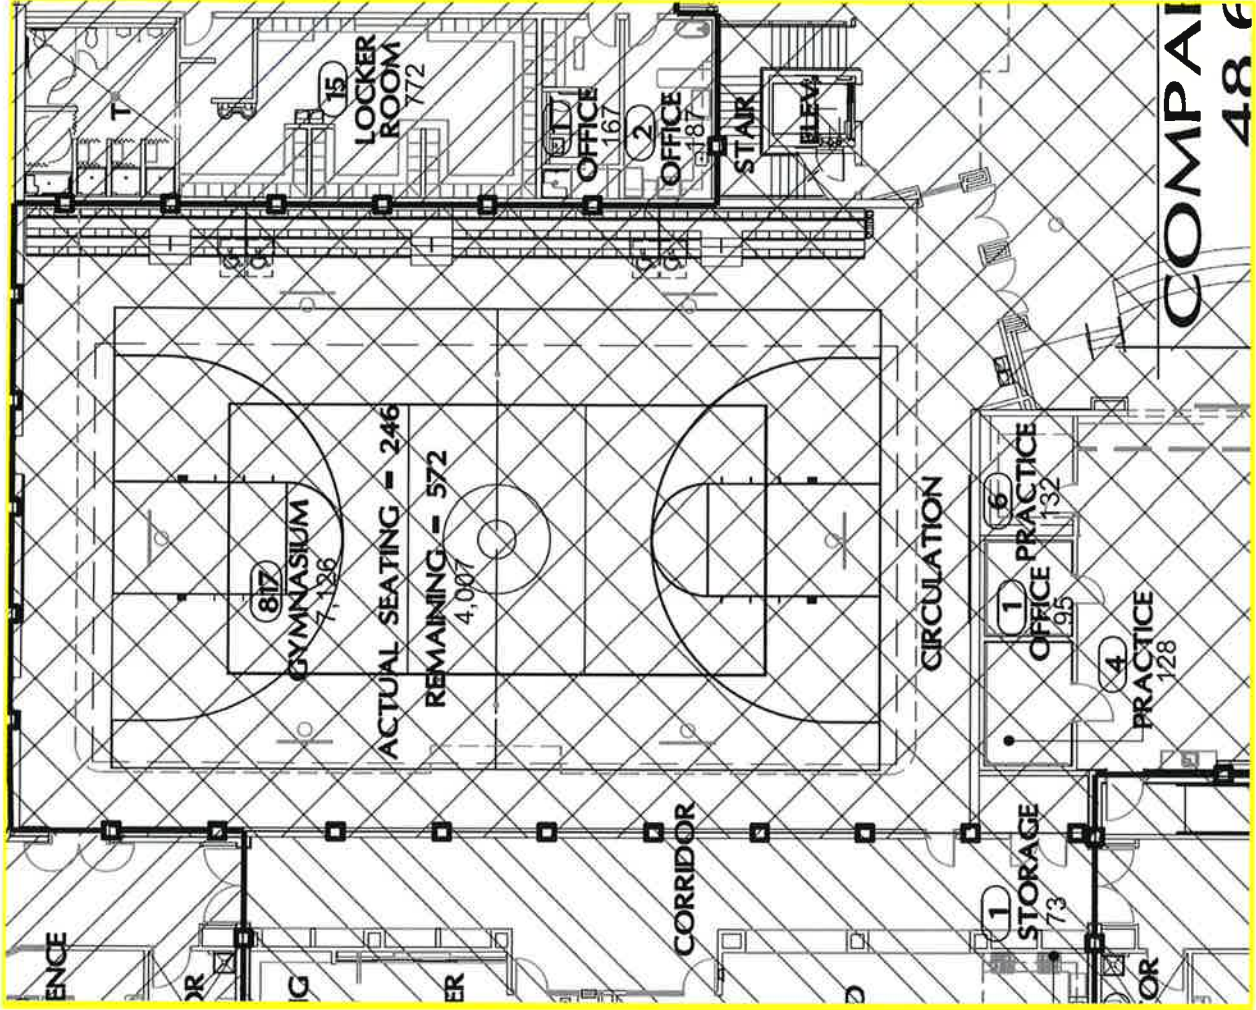

COMPACT  
486

**Reservation:** Fremont County School District #24 Board of Trustees reserves the right to refuse any and all bids, and to accept the bid which, in its judgment, will best serve the needs of the school district.

**BID**

Fremont County School District #24 is sales tax exempt

Anticipated Date of Start of Work

This proposal is hereby respectfully submitted:

Date: \_\_\_\_\_

Bidding Company Name: \_\_\_\_\_

Mailing Address: \_\_\_\_\_

Street Address: \_\_\_\_\_

City, State, ZIP: \_\_\_\_\_

Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_

E-Mail: \_\_\_\_\_

Signature: \_\_\_\_\_

Authorized Bidder's Name: \_\_\_\_\_

Title: \_\_\_\_\_

Federal Tax ID #: \_\_\_\_\_

Warranty Information: \_\_\_\_\_

